
REVISION	DESCRIPTION	DATE	DRAFTER
A0	首次发行	21.01.16	S.He

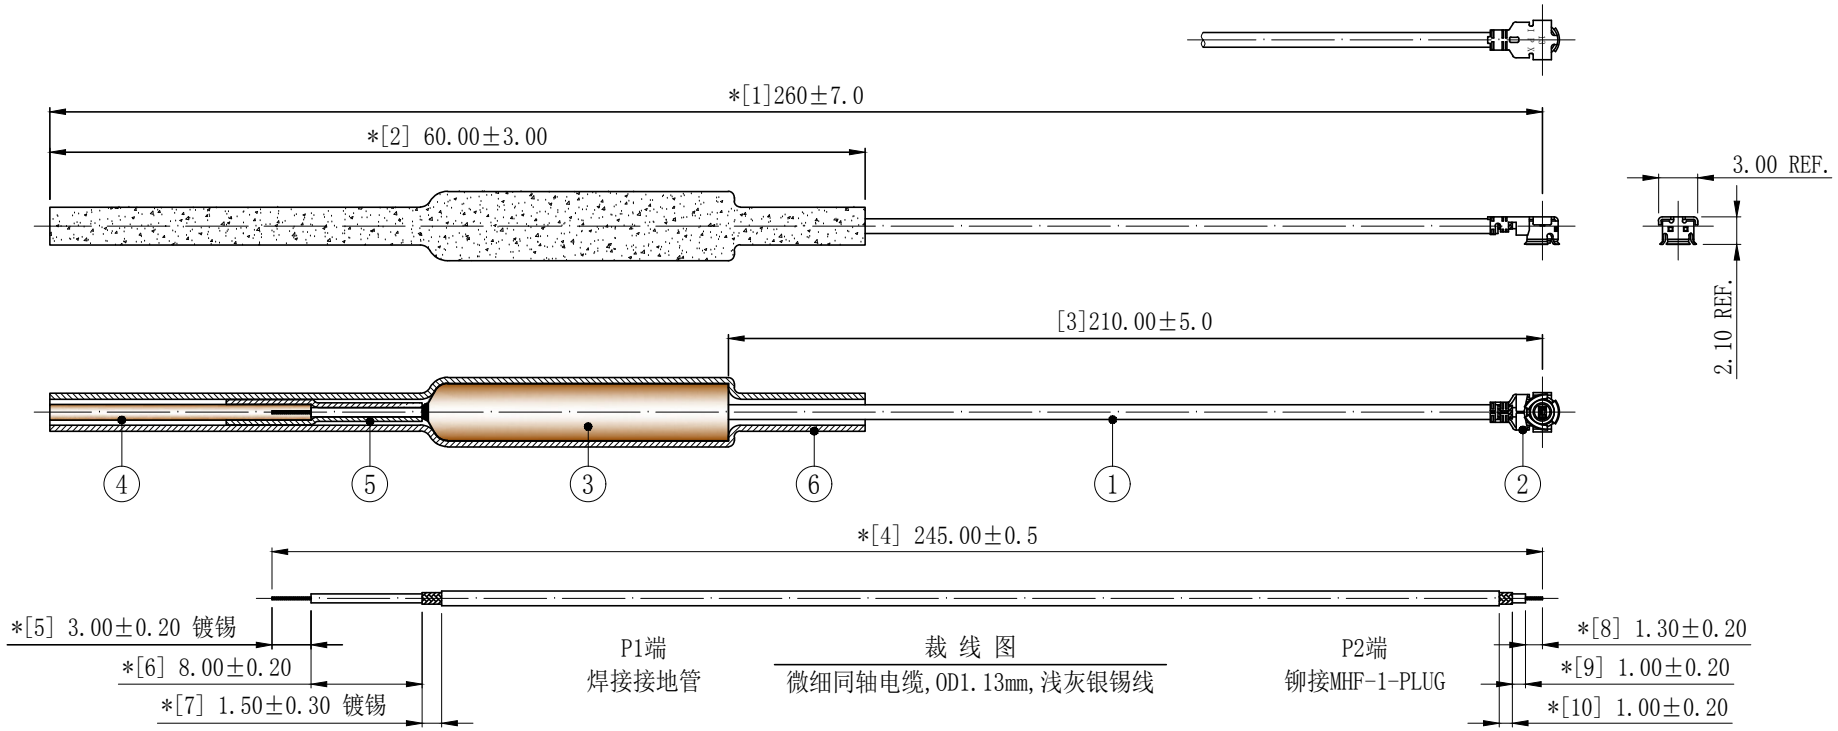

技术要求：

1 电气特性：特性阻抗:50Ω；适用频率范围:2.4GHz-2.5GHz；驻波比:最大2.00。
检验方法：使用矢量网络分析仪100%测试。
2 尺寸检验：[*]为FAI检测项目；*为重点检测项目；■为CPK管制项目。
3 拔出力：最小1.30kgf @ MHF-1-PLUG。
检验方法：沿电缆中心轴,以25±3毫米/分钟的速度,垂直将1.30kg砝码提离桌面即为合格,反之不合格。
3 外观要求：产品表面不得有刮伤、破损和脏污;镀层色泽光亮均匀,不得有氧化。
检验方法：目视全检验。
4 包装规范：50PCS/扎，10扎/包，即500PCS/包。
5 环保要求：产品及其使用之物料皆需要符合RoHS要求。

No.	PART NUMBER	PART NAME & DESCRIPTION	Q'TY	REMARKS
6	2TA040BK1-060	热缩套管,单壁普通型,EVA, 4.0*L60,黑色	1	---
5	2TA015BK1-015	热缩套管,单壁普通型,EVA, 1.5*L15,黑色	1	---
4	2YG022	信号柱, 1.20*L20.00,黄铜,表面除油	1	---
3	2YG013	接地管,抽芯焊锡式,OD4.4*L23*ID1.3,铜镀锡	1	---
2	2LM10P113210	MHF-1 PLUG FOR OD1.13mm CABLE	1	---
1	2C5M11311LG1	微细同轴电缆,OD1.13mm,浅灰银锡线	1	依裁线图裁线

GENERAL TOLERANCE:

LINEAR:	
X	±0.20
X.X	±0.15
X.XX	±0.05
X.XXX	±0.01
ANGLE:	
X°	±4.00°
X.X°	±3.00°
X.XX°	±2.00°
X.XXX°	±1.00°

HJ-Tech 东莞市皇捷通讯科技有限公司

FILE NAME: 产品图	TITLE: 射频天线组件 内置天线,1.13浅灰银锡线,P1端焊接铜管+铜柱,P2端打一代端子, 裁线长245mm,总长260mm
ENG/DATE: Mark/19.04.15	
CHE/DATE:	P/N: 3N0102LG-005
APP/DATE:	UNIT: mm / SCALE: 1:1 / REVISION: A0 / SHEET: 1/1

COMPLIANCE WITH THE REQUIREMENT: ■RoHS; □HF; □SONY SS-00259; □OTHERS
*NO USING ESTRICTED AND BANNED SUBSTANCE

H372