
REVISION	DESCRIPTION	DATE	DRAFTER
A0	首次发行	21.04.30	S.He
A1	贴片天线外壳增加印字“4G”	21.05.21	S.He

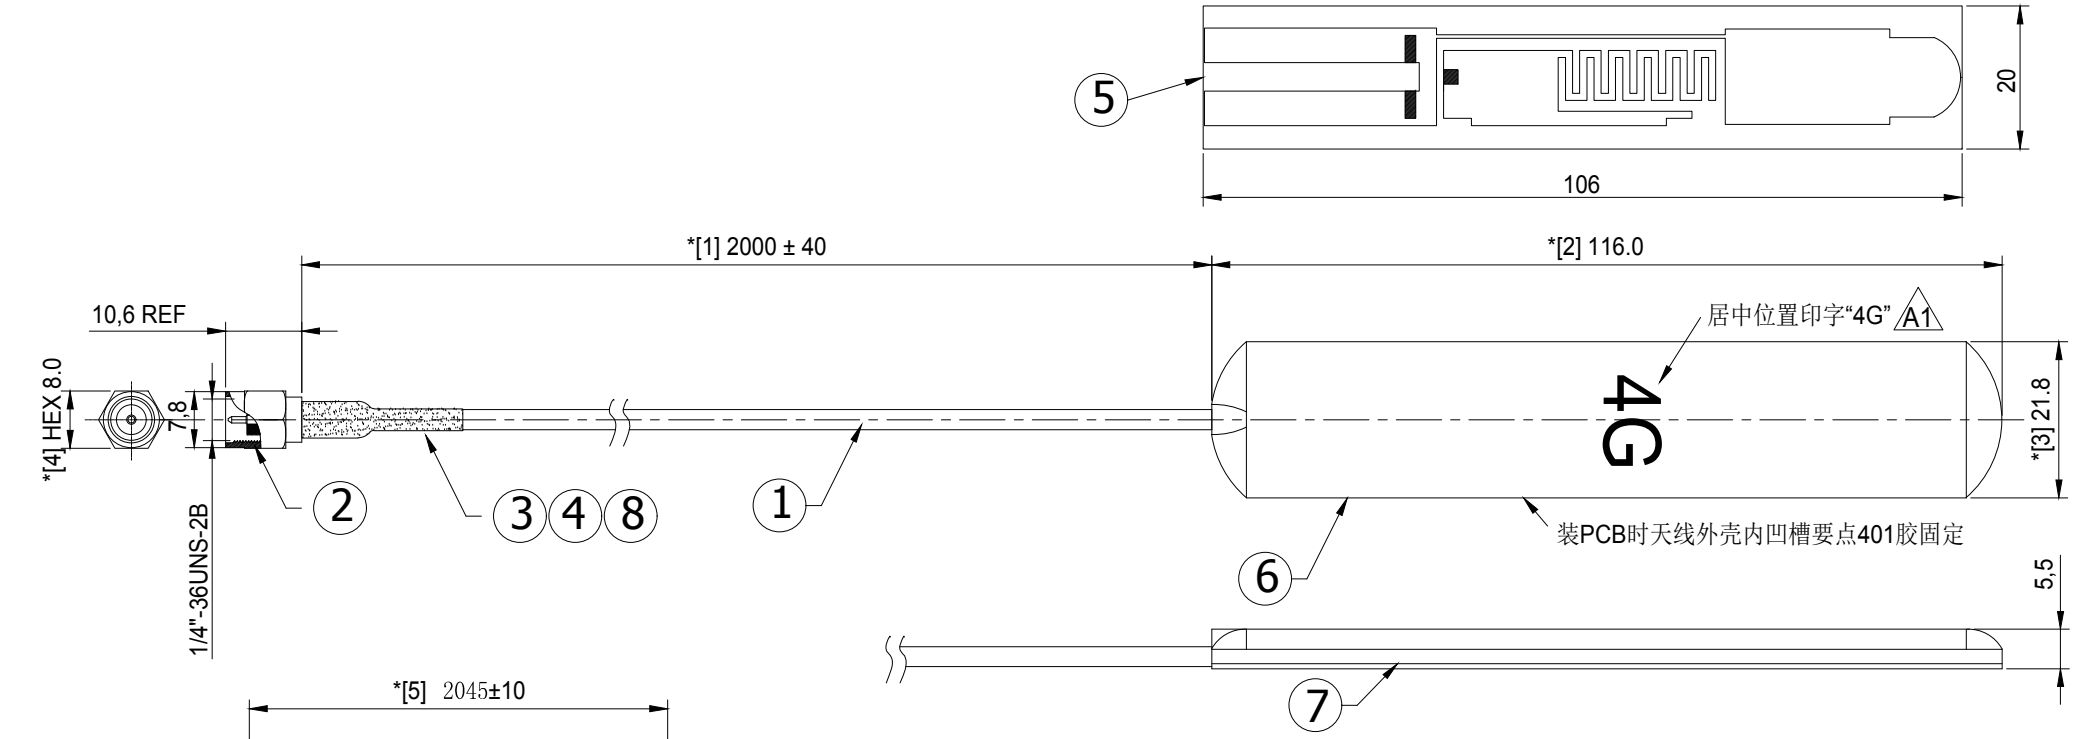

每批次需做成品首件确认

技术要求：

1 方向要求: 无方向要求。

2 电气特性：特性阻抗:50Ω；频率范围:824-1990MHz&1710-2170MHz,2300-2690MHz；
检验方法：使用网络分析仪100%比对Gold sample波形测试。

3 尺寸检验：[*]为FAI检测项目；*为重点检测项目；■为CPK管制项目。

4 外观检验：目视全检。

5 包装规范：1PCS/扎，1PCS/袋。

6 环保要求：产品及其使用之物料皆需要符合RoHS要求。

NO	PART NUMBER	PART NAME & DESCRIPTION	Q'TY	REMARKS
8	2LC15S-601	铜管,C3602铆料,镀镍OD:3.9*L9.0*内孔3.2mm	1	---
7	2MH087	双面3M不干胶贴纸	1	---
6	2SBKG1901	贴片天线外壳，印字“4G”	1	---
5	2YP036	贴片天线PCB板	1	---
4	2TA035BK1-015	Ø3.5*L15.0mm,无卤阻燃,125H2普通型,黑色	1	---
3	2LC15PM623-5	SMA 公针，镀金2u	1	---
2	2LC15PM623-2	SMA 公头主体黄铜镀金(主体+胶芯)	1	---
1	2C5R17414BK1	RG174黑色64编纯铜线-50 OHM	1	---

A1

GENERAL TOLERANCE:

LINEAR:	
X	±0.20
X.X	±0.15
X.XX	±0.05
X.XXX	±0.01
ANGLE:	
X°	±4.00°
X.X°	±3.00°
X.XX°	±2.00°
X.XXX°	±1.00°

HJ-Tech 东莞市皇捷通讯科技有限公司

FILE NAME: 产品图	TITLE: 射频天线组件 贴片天线,RG174黑色线,P1 PCB P2 SMA公头公针，线长L=2M
ENG/DATE: HE XIU/21.04.30	
CHE/DATE:	P/N: 3E1901BK-003
APP/DATE:	UNIT: mm / SCALE: 1:1 / REVISION: A0 / SHEET: 1/1

COMPLIANCE WITH THE REQUIREMENT: ■RoHS; □HF; □SONY SS-00259; □OTHERS
*NO USING ESTRICTED AND BANNED SUBSTANCE

H546