


REVISION	DESCRIPTION	DATE	DRAFTER
A0	首次发行	21.09.14	S.He

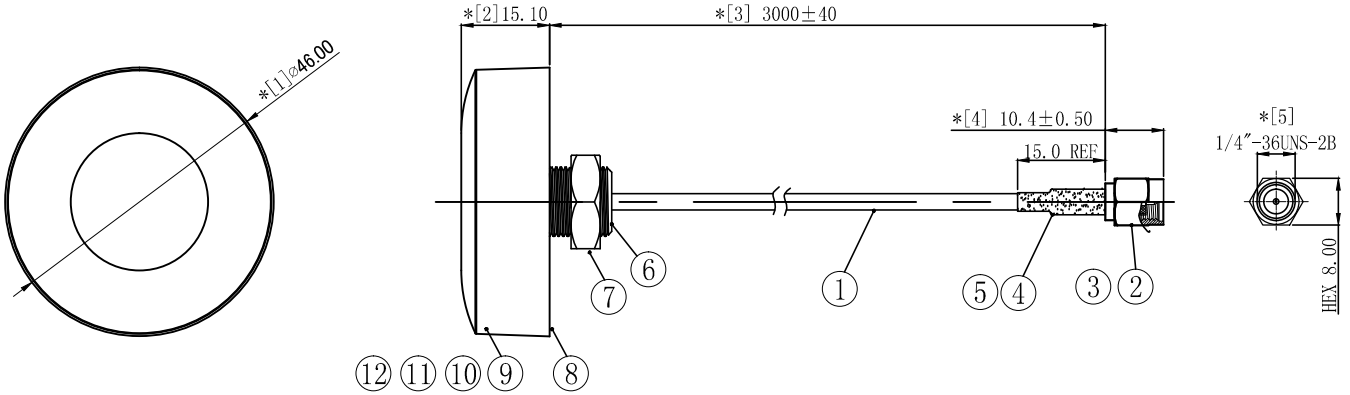



3D 视图

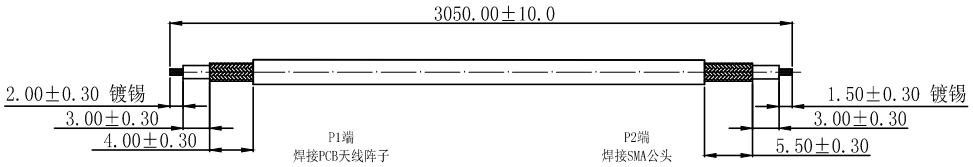

No.	PART NUMBER	PART NAME & DESCRIPTION	Q'TY	REMARKS
13	2MH030	L10*W15mm*T9.0，EVA+双面背胶	3	---
12	2YG085	铜管,OD4.0 L10.0内孔3.2mm	1	---
11	2YP085	wifi 下层PCB，带3M L300背胶 ，FR-4	1	---
10	2YP084	wifi 上层PCB，FR-4，OD41.2*T0.6mm	1	---
9	2SBKG3801-1	小平头磨菇塑胶体，黑色抗紫外线OD:46.0*H:15.1mm	1	---
8	2SBKG3801-2	塑胶盖，黑色抗紫外线OD:46.0mm	1	---
7	2LC00S-313	M12螺母,H:16.0*T:5.0mm	1	---
6	2LC00S-314	M12螺柱,OD:15*L:13.0mm	1	---
5	2TA035BK1-015	OD:3.5*L15.0mm,无卤阻燃,125H2普通型,黑色	1	---
4	2LC15S-601	铜管,镀镍OD:3.9*L9.0	1	---
3	2LC15PM623-5	SMA公针,镀金	1	---
2	2LC15PM623-2	SMA公头 H8.0*L16.5镀金	1	---
1	2C5R17414BK1	RG174 coaxial-cable,BLACK	1	---

Technical requirements:

1 electrical characteristics: impedance: 50 Ω;
Applicable frequency range: 2.4GHz~ 2.5GHz VSWR <2.0;

2.Dimension inspection: [*] is the FAI test item;* As a key test item;■ Controlled items for CPK.

3. Packaging specification: 1PCS/ Bag

4.Environmental requirements: products and materials used must meet RoHS requirements.

COMPLIANCE WITH THE REQUIREMENT: ■RoHS; □ HF; □ SONY SS-00259; □ OTHERS
*NO USING ESTRICTED AND BANNED SUBSTANCE

GENERAL TOLERANCE:

LINEAR:	
X	±2.00
X.X	±1.00
X.XX	±0.50
X.XXX	±0.30
ANGLE:	
X°	±4.00°
X.X°	±3.00°
X.XX°	±2.00°
X.XXX°	±1.00°

HJ-Tech 东莞市皇捷通讯科技有限公司

FILE NAME: product drawing	TITLE: wifi小平头磨菇天线，RG174, SMA公头公针，线长L3.0M
ENG/DATE: S.He/21.09.14	
CHE/DATE: .	P/N: 3E0605BK-004
APP/DATE: .	UNIT: mm / SCALE: 1:1 / REVISION: A0 / SHEET: 1/1