



REVISION	DESCRIPTION	DATE	DRAFTER
A0	首次发行	22.09.07	S.He

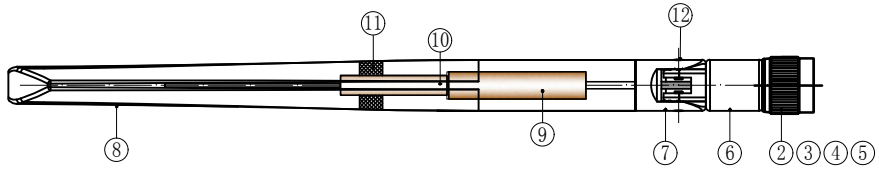

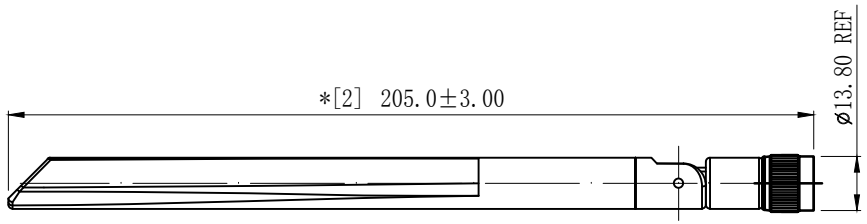

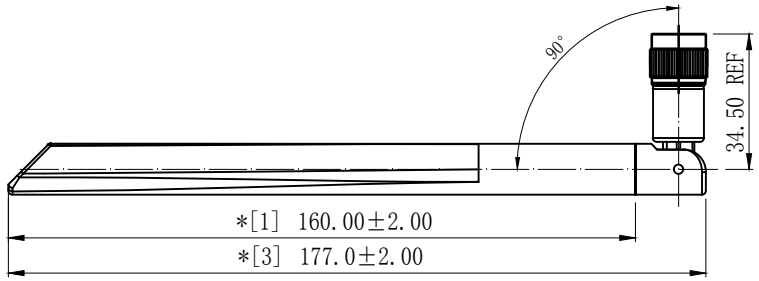

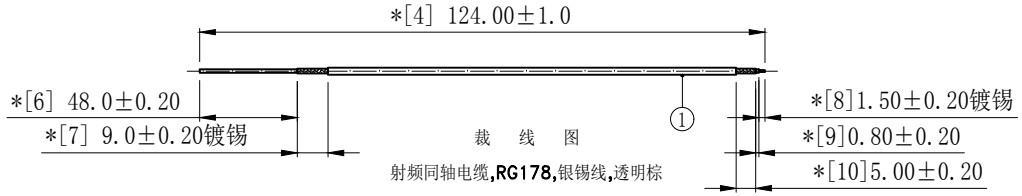

技术要求：

1 电气特性：使用矢量网络分析仪100%测试。（带转接线测试）
特性阻抗:50Ω；适用频率范围:1.88-1.93G；驻波比:最大2.00;增益:3dBi。
2 尺寸检验：[*],FAI首件工艺检验项目；◆,QIP重点检验项目；★,CPK制程管制项目。
3 外观检验：目视全检。产品表面不得有刮伤、破损和脏污;镀层色泽光亮均匀，不得有氧化。
4 包装规范：20PCS/扎，5扎/包，即1000PCS/包。
5 环保要求：产品及其使用之物料皆需要符合RoHS要求。
6 接头必须铆压。

No.	PART NUMBER	PART NAME & DESCRIPTION	Q'TY	REMARKS
12	2SBKM2802	大铆钉,OD:2.4*L5.1mm,POM,黑色	2	---
11	2MH110	L15.0xW10.0xT3.0mm,海绵单面背胶	1	---
10	2YG041	OD5.0*L27.1铜管，黄铜材质	1	---
9	2YG132	OD7.0*L42.5组装铜管，黄铜材质	1	---
8	2SBKG1800	刀峰杆套，OD:13.0*L160mm,TPEE,黑色	1	---
7	2SBKU31R0	CD384上固,OD:13.00*L28.2mm,PC,黑色	1	---
6	2SBKD36R0	CD13小孔下固,OD:13.0*L25.3mm,PC+PBT,黑色	1	---
5	2LC17PF802-6	绝缘粒	1	套料
4	2LC17PF802-9	助推管，锌合金，镀镍	1	
3	2LC17PF802-5	TNC 母针镀金	1	
2	2LC17PF802-2	TNC 公头，电着黑	1	
1	2C5R17811BN1	RG178透明棕银锡线-50 OHM	1	---

GENERAL TOLERANCE:

LINEAR:	
X	±0.20
X.X	±0.15
X.XX	±0.05
X.XXX	±0.01
ANGLE:	
X°	±4.00°
X.X°	±3.00°
X.XX°	±2.00°
X.XXX°	±1.00°

HJ-Tech 东莞市皇捷通讯科技有限公司

FILE NAME: 产品图	TITLE: 射频天线组件 直连式外置天线,G18黑色,铜管+铜管,RG178+TNC 公头母针(1.88-1.93G),(R35-RF21080-0BM)
ENG/DATE: S.He/22.09.07	
CHE/DATE:	P/N: 3D1805BK06-002
APP/DATE:	UNIT: mm / SCALE: 1:1 / REVISION: A0 / SHEET: 1/1

COMPLIANCE WITH THE REQUIREMENT: ■RoHS; □HF; □SONY SS-00259; □OTHERS
*NO USING ESTRICTED AND BANNED SUBSTANCE

H431