
REVISION	DESCRIPTION	DATE	DRAFTER
A0	FIRST RELEASE	20.06.30	Mark

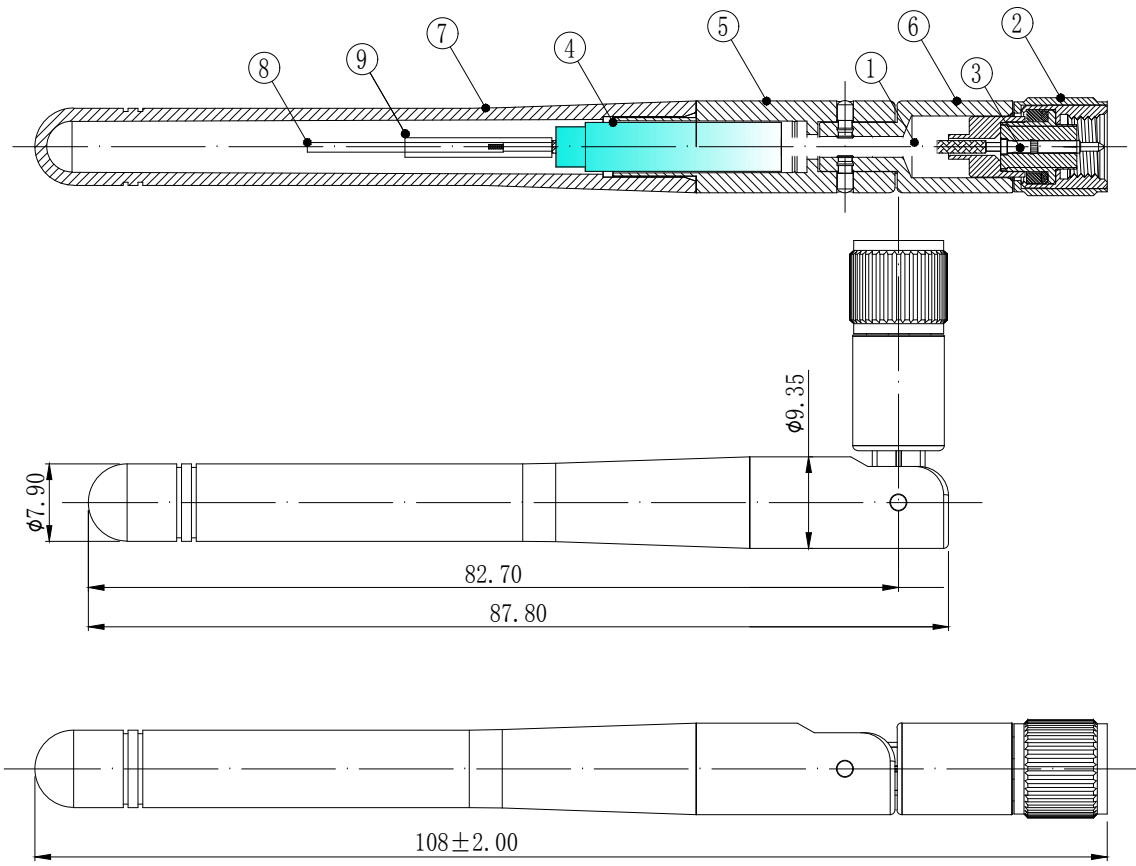

技术要求：


1 电气特性：使用矢量网络分析仪100%测试。
特性阻抗:50Ω；适用频率范围:2.4GHz-2.5GHz；
驻波比:最大2.0 ； 增益 ： 3DBI

2 尺寸检验：[*]为FAI检测项目；*为重点检测项目；■为CPK管制项目。

3 外观检验：目视全检。产品表面不得有刮伤、破损和脏污；
镀层色泽光亮均匀，不得有氧化。

4 环保要求：产品及其使用之物料皆需要符合RoHS要求。

需做首件确认,成品测试OK,方可裁线

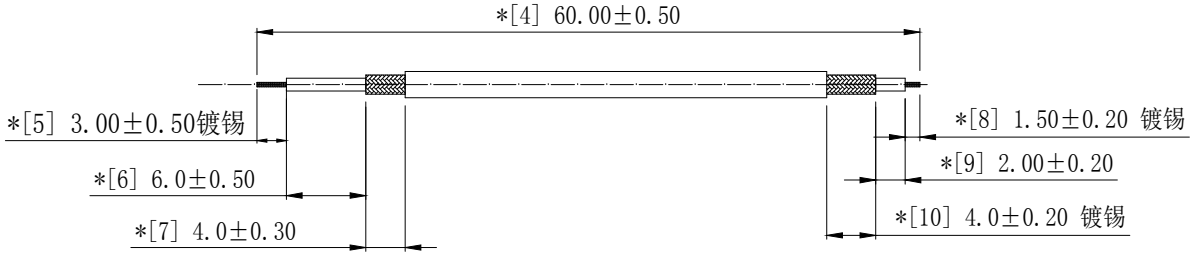

P1 端
焊接接地管

裁 线 图

P2 端
焊接SMA公头公针

9	2TA015BK1-015	Ø1.5*L15.0mm,无卤阻燃,125H2普通型,黑色	1	---
8	2YG022	OD1.20*L20.00mm,材质黄铜	1	---
7	2SBKG0200	套杆,L67.5*Ø9.35，TPEE 黑色	1	---
6	2SBKD34N2	下固定座小孔,Ø9.40*L19.7*Ø5.10，PC黑色	1	---
5	2SBKU32N3	上固定座,Ø9.35*L28.8，PC 免铆钉式	1	---
4	2YG030	2.4G铜管,L23.00*Ø5.20*Ø1.55，锌合金	1	---
3	2LC15PM804-5	SMA 公针OD:1.5*L10.2mm，镀金2u''	1	---
2	2LC15PM808-8	SMA公头 黑色POM 外壳， 主体	1	---
1	2C5R17811BN1	微细同轴电缆,RG178,银锡线,棕色	1	---
No.	PART NUMBER	PART NAME & DESCRIPTION	Q'TY	REMARKS

GENERAL TOLERANCE:

LINEAR:	
X	±0.20
X.X	±0.15
X.XX	±0.05
X.XXX	±0.01
ANGLE:	
X°	±4.00°
X.X°	±3.00°
X.XX°	±2.00°
X.XXX°	±1.00°

HJ-Tech 东莞市皇捷通讯科技有限公司

FILE NAME: 产品图	TITLE: 2.4GHz外置直连式;RG178,P1端焊接SMA公头公针 P2端焊接铜管+铜柱；产品长L=108mm			
ENG/DATE: Mark/20.06.30				
CHE/DATE:	P/N: 3D0203BK02-004			
APP/DATE:	UNIT: mm	SCALE: 1:1	REVISION: A0	SHEET: 1/1

COMPLIANCE WITH THE REQUIREMENT: ■RoHS; □HF; □SONY SS-00259; □OTHERS
*NO USING ESTRICTED AND BANNED SUBSTANCE

H340